





JQX-38FM



JQX-38FM JQX-38FV



Contact specification


Contact form	2Z、2H、2D、3Z、3H、3D
Contact resistance	≤100mΩ (1A 6VDC)
Contact material	AgCdO AgSnO ₂
Contact capacity	A:40A 250VAC/30VDC ; B:40A 250VAC/30VDC

Technical specification

Insulation resistance	≥1000MΩ (500VDC)
Dielectric strength	Between coil and contact ≥2500VAC 1min
	Between open contact ≥1200VAC 1min
Operate / Release time	≤25ms/15ms
Terminal type	Quick terminal mounting

Coil specification

Rated coil power	DC2.5 W AC5VA
------------------	---------------

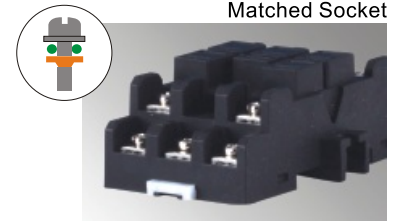

DC Coil data

Nominal voltage	Operate voltage	Release voltage	Coil resistance
VDC	VDC	VDC	Ω ± 10%
12	9.6	1.2	57
24	19.2	2.4	230
48	38.4	4.8	920
60	48.0	6.0	1440

AC Coil data

Nominal voltage	Operate voltage	Release voltage	Coil resistance
VAC	VAC	VAC	Ω ± 10%
12	9.6	3.6	10
24	19.2	7.2	40.3
110	88.0	36.0	847
220/240	176.0	72.0	3380/4030

Outline dimension、Mounting holes (Bottom view)、 Wiring diagram (Bottom view)

